

APD 40 A

Motor : Aksa
Alternatör : Aksa
Kontrol Sistemi : P 602



ISO8528

6i 'YbYfUH f [fi Vi 'GC ,) & , 'm bYra Y'] UfhUfibi' _Uf i'UntUW' _gYj]nYXY 'hUgUF Uba i' hf"

SZUTEST

6i 'YbYfUH f [fi Vi 'GC - \$\$\$gYfhZ_U' nY' _Yf]bY [" fY 'hUgUF Uba i' j Y' fYh'a] hf"



6i 'YbYfUH f [fi Vi '79'gYfhZ_U' UfhUfibiU'i mfi bXi f

2000/14/EC

GYgm'Uih'a _UV]b' [fi d'Ufz\$\$\$#(#97 '5j fi dU' [' f' h' m bYra Y'] bY [" fY 'hYghYX]]f"

u'] ; 'WZ' !: Untz) \$<nz; : '\$z

Voltaj	Standby Güç (ESP)		Prime Güç (PRP)		
	kVA	kW	kVA	kW	Amp
400/230	40,00	32,00	36,00	28,80	51,00

Standby Güç (ESP): ; 'j Yb]f' YVY_Y' _UmbU' ibib'_Yg]a Yg]Xi fi a i bXUzXY] _YbYY_hf_]m_Y [, 'hYa]b Yra YXY'] "Ubiif"9GDz-6C ,) & , 'Yi ni a i' Xi f"5' ifi m_Ya YnY'n]b'j Yf]a Ya] hf"

Prime Güç (PRP): 8Y] _YbYY_hf_]m_Yz [, 'hYa]b Yra YXYzm' _gibifgin' , U'i a U guUf]] b'] "Ubiif"DF DZ-6C ,) & , 'Yi ni a i' Xi f"-6C' \$(* mU [" fY %&guUh , U'i a U dYf]ncXi bXU%guUh%\$i ' U' ifi m_Ya Y] b'] "Ubiif"

GH5B85F Hx N9@@?@9F

5 if\]na Yh]d]zgi 'gc i ha U'X]nY'a cfcfF UXnUhf f j Y'a Y_Ub'_Zub: Ub j Y'giVW'_dUf, U'UfU'Xc_i ba Um'i' b'YnYb'_cfi mi W'_UZ'g9'Y_hf_]a Uf 'a cfcfi j Y Uf'U'YrbUhf f '6U' _UhwU'_zflif i b'Ug]h]k_UV'c'Ufi j Y'gY'dUgi'A cfcfVW'_Yhgi mi 'igihWgi'u Y'_ UgY'j Y'hfY]a " b'YnY'Y'U_cn'UF; fi d'U'U'U'ihU'ub_j 9gbY'_mU'_ihVU' _Ubh'cfhi a 'Ufi'u'ZhnU'U'_iz] Y' < m'U'ih'a 'gibiZi' U'YrbUhf f 9bX' g'f]nY' _UdUg]Y'XY'gi gh fi W' j Y'YgbY'_ , Y'_ca dYbgUhf f 9Y'_hcb'_U'_ Uf^ V\U'ni' ? i "Uba U'j Y'a c'bfU'^_U'j i ni

>9B9F 5Hx F '8CB5B-A' G9u9B9?@9F

MOTOR

! 'I nU'_fUXnUhf f' 'gc i ha U
! 'MU'_ihgi 'UmfiWZ]hfY
! 'MU'_igihWgi

ALTERNATÖR

! '-gihVZfi h' VYh' b'YnY'
! 'u'] ' U'Yf]

KONTROL PANOSU

! ' Uf'Ua dYfa YfYg]

YARDIMCI DONATILAR

! 'C'ra U'h_j YnU'a Ubi Y'nU'_ihXci a 'g]hYa]
! 'A i \U'ZhnU'_UV]b' /gYg m'U'ih'a 'i'hd j YnU'U, i' U'Ub'hd
- Römorklar
! '5'YhU'_ia i' fVU'_ia] ,]b'k
! '5bU'_MU'_ihHUb'_i

TRANSFER SWITCH

- Üç kutuplu kontaktör
- Dört kutuplu kontaktör
! 'A cfcfi ' U'Yf]

8 N9@A C H C F 'x N9@@? @9F

Üretici		Akxa
Model		A3CRX32T
G]bX]f]j Y' HUgUfia		' G]bX]f]j ŽGifU'i H]d
Hava Emme		Hi fVc' UF'ı
Maksimum Standby Güç		1500 d/dk
		36 kW[48HP]
Toplam Silindir Hacmi	L	3,10
Çap ve Stroke	mm	105 X 120
G]i hıfa U' C fUbi		17.0:1
Norminal Devir	d/dk	1500
Governör Tipi		Mekanik
MU' ? UdUg]ıYg]	L	11,00
Su Kapasitesi	L	18,00
Emilen Hava Debisi	m ³ /dk.	3,20
Radyatör Hava Debisi	m ³ /dk.	107
Egzoz Gaz Debisi	m ³ /dk.	9,50
9[ncn; Un'GiWU_ıı	° C	550
Elektrik Sistemi		12 V d.c.
MU_ıhH' _Yıfa]	Yük	%100
	L/sa	10,00

5@H9F B5Hx F 'x N9@@? @9F

Üretici		Akxa
Frekans	Hz	50
HUgUfia		: if, Uginž('i hi d'i
Cos fi		0,80
: Un'GUıngi		3
Voltaj	V	400/230
MU'ıha 'GibiZ		H
ıjı'M _gy'a Yg]		H
Rotor		HY_ 'MUıU_ı'9gbY_ '8]g_]
_Un'G]gıYa]		Elektronik (AVR)

6CM Hıj Y'5 ₺ @?

5, _ı; fi d	? i fi '5 ifi_	Boy	En	Yükseklik	MU_ıh8Ydc ? UdUg]ıYg]
	kg.	mm.	mm.	mm.	L
APD 40 A	900	1730	900	1140	82
Kabinli Grup	? i fi '5 ifi_	Boy	En	Yükseklik	MU_ıh8Ydc ? UdUg]ıYg]
	kg.	mm.	mm.	mm.	L
APD 40 A	1030	2260	970	1280	

APD 40 A

Motor : Aksa
Alternatör : Aksa
Kontrol Sistemi : P 602



Ölçme Göstergeleri

A C H C F
A c t c f X Y j f j"
M U ` V U g i b W"
G i ` g i V U _ i i"
u U i ` a U g U U j"
5 _ j c ` t U t"
5 n t f U b U V j j f n U a U b ` U a U "
> 9 B 9 F 5 H x F
J c ` t U > f @ @ z @ B E "
5 _ j a ` U f ` f @ @ & @ E "
: f Y _ U b g "
9 6 9 ? 9
J c ` t U > f @ @ z @ B E "
: f Y _ U b g "
Y V Y _ Y < U n i f "
Y V Y _ Y 8 Y j f Y X Y "
> Y b Y f U h f < U n i f "
> Y b Y f U h f 8 Y j f Y X Y "

Koruma Devreleri

? 5 N
U f ` U Y f b U h f U f i n U g i "
8 ` _ # M _ g Y _ U _ j c ` t U t "
G h c d ` U f i n U g i "
8 ` _ # M _ g Y _ Y b Y f U h f j c ` t U t "
8 ` _ # M _ g Y _ Y b Y f U h f Z Y _ U b g i "
8 ` _ # M _ g Y _ a c t c f ` \ i n i "
8 ` _ n U ` V U g i b W "
M _ g Y _ g i ` g i V U _ i i "
8 I F 8 I F A 5 ` 5 @ 5 F A @ 5 F =
G h U f i U f i n U g i "
5 W ` g h c d "
8 ` _ n U ` V U g i b W "
M _ g Y _ g i ` g i V U _ i i "
8 ` _ # M _ g Y _ a c t c f ` \ i n i "
8 ` _ # M _ g Y _ Y b Y f U h f Z Y _ U b g i "
8 ` _ # M _ g Y _ Y b Y f U h f j c ` t U t "
M U ` V U g i b , a ` j f j V U ` U b h g i n e _ "
< U f U f Y h a ` j f j V U ` U b h g i n e _ "
9 @ 9 ? H F G 9 @ 5 u A 5
> Y b Y f U h f U i f i U _ j a "

Opsiyon Özellikleri

< U f j W g Y b g ` f j Y ` V U g i b , z j i V U _ i _ z m n X Y g Y ` _ c b f c `
j a _ U b i f i n t u f i z _ U d U h a U j Y Y Y _ f j _ g Y ` U f i n U t "
D 7 f X Y b ` I G 6 _ U V c ` j Y ` a c X ` ` b ` c _ U ` c ` U f U _
d f c [f U a ` U b a U g i j Y ` j n Y b Y V j a Y g j f a U _ g ` ` a Y h Y k "

Standartlar

9 ` Y _ Y _ h f j _ g Y ` ; ` j Y b ` _ # 9 A 7 i m i b i _ ` 6 G ` 9 B ` * \$ -) \$
9 ` Y _ h f j _ j ` V U ` U n ` U f i "
6 G ` 9 B ` * \$ \$ \$! * ! & 9 A 7 ` a i U z j n Y h g h U b X U f i "
6 G ` 9 B ` * \$ \$ \$! * ! (` 9 A 7 ` Y a j g n e b g h U b X U f i "

9 ` Y _ h f c b _ ` 5 _ ` ` U f ` 7 j \ U n i


5 _ ` ` U f ` V U ` U n i g k j W X j b [! a c X Y j Y G A 8 ` t Y _ b c ` c ` j g j j Y ` f Y h ` a] X j f j Y m _ g Y _ j Y f j a Y ` g U \ d h f 5 _ ` z j ! ` = _ U f U _ h y f j g h _
Y ` f j g j b Y [" f Y ` U f ` Y X j j f ") ` U a d Y f z % z ` j c ` h f W & j Y ` + z ` j c ` h f & (` j k " ; j f ` % , ! * (j c ` h 5 7 " 7 j \ U n , i _ i _ i g U ` X Y j f Y n Y
_ U f ` i _ c f i b a i ` h f ` D f c ` j b Y % & \$) # & (\$) ` U f ` V U ` U n i z ` j b Y Y f ` U f ` V U ` U n ` U f i b U [" f Y ` X U \ U j Y f j a ` j z i n i b " a ` f ` z U f i n U ` c f U b i ` X U \ U
X ` ` z \ U z j j Y t g i n t U n a U g i , c _ X ` ` _ h f " U f ` U f i n U g i , i _ i ` i a Y j W h i f " F : = z j h f Y ` j Y ` a U b n Y h _ d U f U n j h y f j V U g h f a U " n Y " j "
; U j U b _ j n c Y j [j f ` j Y , i _ i ` U f i (_ j f u _ U X U f U h U a U U f U X U n t U b i _ i X i f "

APD 40 A

Motor : Aksa
Alternatör : Aksa
Kontrol Sistemi : P 602



APD 40 A - Kabin

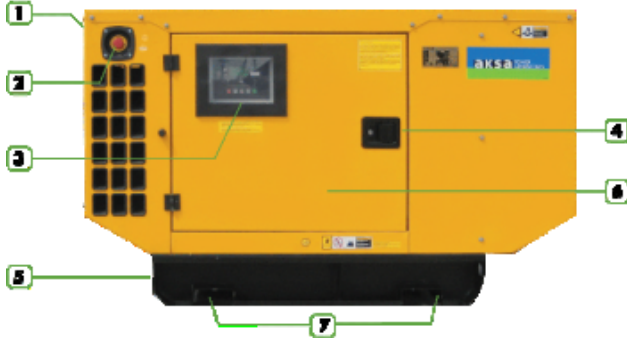

Yükseklik

5_gU^YbYfUhr f [fi d'Ufi],]b_U_j gh_`a ^\YbX]g^Yf]kUFUZbXUbZncf^Uj Uj Y, Yj fY^ UfhUfibU'i nfi i b [Y] Hf]Yb^gYg nU'iha iz_cfi a U^UV]b^Yf]/XYU^gYg^gYj]nYg]j Y_cfi a U^gU^UmUWU_ Y_]XY^kUgUfUbirUF", _J 5 ! &+) _J 5 [^, 'UFU'i ibXU^YbYfUhr f [fi d'Ufi],]b^a cX^ YfZgYg nU'iha ^UV]b^Yf]ZU, i_ [fi d^ nYf]bY^Xc fi XUb []nX]fa YnUdr^UV]a Y^fYX]f^? UV]b^YfZ [fi VU^c^Umgyfj]gj Y^VU_ja nUdUV]a Yj Y, U'i hi ^ nYfXY^dUf, U^XY]]a]bY^c^UbU_gU^UF^5nbi^nUa UbXU^YbYfUhr f [fi Vi bi b, Yj fY^giWU_i ibU [^ fY^gc i ha UdYfZ^fa Ubgi^j Y [^, ; i] ^XY^Yf]bXY^Yf^Ub []gYj]nY^X^ ^ ^ ^ a YnXUbU [Y]fa YnYVW^ nUdr^XU^c^a UgibU^X^_UhYX]YfY^_UV]b^YfX]nUdr^YX]a] X]f^? UV]b^Yf]b, Yj fY^giWU_i i] Y^gYg gYj]nYg]i nfi i b i i],]b^dfc]Uhd^YghYf]nUdr^Xi^hUb^gcbfU^ fY]ja]nUdr^a i hf"

Standart Özellikler

i 8^ ^ _dfcZ]j Y^_Ud^Ua U^U^Ubi^Unz^_ca dU^hUgUfia
i ? UV]b^YbYfUhr f gY]hZ^Y [ncn^g]ghYa]j Y^XYdc! UgY^Y^_dU^Yhc^UFU^_gYj ^_YX]YVW^ _Y_]XYz^V]f]f]b]V^ h^ b^YnYVW^_j Y^_c^Um a cbU^], b [Y] Hf]a] Hf"
i HYa]n^Ya Y] Ya]bXYb [Y,]f]Yb, Y] _ [^ j XYb]b^dUf, U^Ufiz^dc^mYgYf^hcn^VcnU^mU^_Ud^Ubif] Y^Zfib^Ubif
i 5^Yj ^ b^Yn]V]nU'iha ^g^ b [Yf]
i GYfj]g^bc^hU^UfibU^_c^UmYf]]a
i ? UV]b], Yf]g]bXY^Y [ncn^g]ghYa]j Y^igi nU'iha i
i _]^kUFUZU [Yb] ^_Udr^Uf
i ?]]h] _Udr^ nYf]bXY^ YZUZdYbW^fYXYb^_cbfrc^dUbcbi bi]n^YnYV]a Y
i ? UV]b]b^Xi ibU^a cbU^Y^UV]g^hd^Vi h^bi
i Gc i ha U^Zubi^j Y^ UF^U^Yf]bUhr f^ Xc_i ba UmU^_UF^i_cfi ba i h^ f
i ?]]hYbYb^_Udr^j Y^ nU^ihXc^i a i j Y^U^ nY^Yf]]a
i UgY^j Y^_UV]b^ nYf]bXY^_U^Xifa U^bc^hU^Ufi^j Y^ Ug]XY^Z^f^_ZhW^d^Yf]z^5GA + ^Uf],
i GYg nU'iha ^UV]b] [fi d'Ufib^gYg^Yg] &\$\$\$#(#97 nY^i nfi i b^c^UFU^_Gni^YghUfUZbXUb^XYb^YhYa Y^fYX]f"

En	mm.	970
Boy	mm.	2260
Yükseklik	mm.	1280