



INTRODUCTION

Aksa power generation system, providing optimum performance, and reliability, for stationary standby, prime power, and continuous duty applications. All generator sets are factory build, and production tested.

Power (kVA)

400V 3Phase, 50Hz, PF 0.8

VOLTAGE	STANDBY RATING (ESP)		PRIME RATING (PRP)		Standby Current (A)
	kWe	kVA	kWe	kVA	
400/230	84,0	105,0	80,0	100,0	151,6

STANDBY RATING (ESP) Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528-1. Overload is not allowed.

PRIME RATING (PRP) Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528-1. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation.

General Characteristics

Model Name	APG 105 LPG
Frequency (Hz)	50
Fuel Type	LPG
Engine Made and Model	PSI6.7L
Alternator	Mecc Alte
Control Panel Model	DSE 7320
Canopy	MS 60

ENGINE SPECIFICATIONS

Engine	PSI
Engine Model	6.7L
Number of Cylinder	6 Inline
Bore (mm)	105
Stroke (mm)	130
Displacement (L)	6.75
Aspiration	Charged Cooled Forced Induction
Compression Ratio	9.75:1
Engine Speed (rpm)	1500
Oil Capacity (Total With Filter) (L)	27
Standby Power (kWm / HP) ^{1,2,3,4} Per ISO 3046	100 / 134
Prime Power (kWm / HP) ^{1,2,3,4} Per ISO 3046	100 / 135



Block Heater QTY	1
Block Heater Power (Watt)	1500
Fuel Type	LPG
Injection Type and System	Spark-Ignited
Governor System	ECU
Operating Voltage (Vdc)	12
Battery and Capacity (Qty/Ah)	1x85
Charge Alternator (A)	90
Cooling Method	Water Cooled
Cooling Fan Air Flow (m ³ /min) ⁵	202
Coolant Capacity (engine only / with radiator) (L)	8 / 16
Air Filter	Dry Type
Fuel Cons. Prime With %100 Load (kg/hr / L/hr) ^{3,4,6}	23 / 45.1
Fuel Cons. Prime With %75 Load (kg/hr / L/hr) ^{3,4}	TBD
Fuel Cons. Prime With %50 Load (kg/hr / L/hr) ^{3,4}	TBD

ALTERNATOR CHARACTERISTICS

Manufacturer	Mecc Alte
Alternator Made and Model	ECP 34 2S/4C
Frequency (Hz)	50
Power (kVA)	100
Voltage (V)	400
Phase	3
A.V.R.	DSR
Voltage Regulation	(+/-)1%
Insulation System	H
Protection	IP23
Rated Power Factor	0.8
Weight Comp. Generator (kg)	349
Cooling Air (m ³ /min)	29.2

Gen.Set Canopy Dimensions

Length (mm)	3960
Width (mm)	1356
Height (mm)	2167

1 Max load and overload ratings based on ISO 3046 gross flywheel power.

2 Technical data based on ISO 3046-1 standards of 77°F(25°C), 14.5Psia (100kPa) and 30% relative humidity.

3 Production tolerances in engines and installed components can account for power variations of ± 5%. Altitude, temperature and excessive exhaust and intake restrictions should be applied to power calculations.

4 All fuel and thermal calculations unless otherwise noted are done at ISO 3046 rated load using LHV for NG of 48.17 MJ/kg.

5 At 0.5 in-H₂O of Package Restriction at STP

6. Volume calculated using density of 0.717 kg/m³ for NG, 0.51 kg/L for LPG




1. Steel structures
2. Emergency stop push button
3. Canopy and panels made from powder coated sheet steel.
4. Control panel is mounted on the baseframe. Located at the right side of the generator set
5. Oil could be drained via valve and a hose
6. Exhaust system in the canopy
7. Special large access doors for easy maintenance
8. In front and back side special large access doors for easy maintenance
8. Base frame -fuel tank
9. Special large access doors for easy maintenance
10. Lifting points
11. The cap on the canopy provides easy access to radiator cap.
12. Sound proofing materials
13. Plastic air intake pockets.

INTRODUCTION

Sound-attenuated and weather protective enclosures for generating sets from Aksa, meet even the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our modular designed sound insulated canopies provide ease of access for servicing and general maintenance and interchangeable components permitting on-site repair. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability.

Control Panel

Control Module	DSE
Control Module Model	DSE 7320
Communication Ports	MODBUS

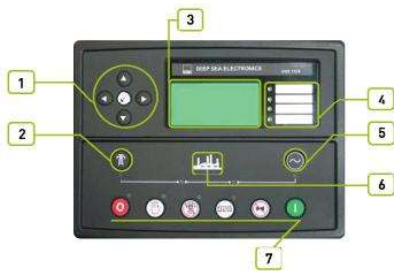

1. Menu navigation buttons
2. Close mains button
3. Main Status and instrumentation display
4. Alarm LED's
5. Close generator button
6. Status LED's
7. Operation selecting buttons

Devices

DSE, model 7320 Auto Mains Failure control module Static battery charger Emergency stop push button and fuses for control circuits

CONSTRUCTION and FINISH

Components installed in sheet steel enclosure.

Phosphate chemical, pre-coating of steel provides corrosion resistant surface

Polyester composite powder topcoat forms high gloss and extremely durable finish

Lockable hinged panel door provides for easy component access



INSTALLATION

Control panel is mounted generating set baseframe on robust steel stand or power module. Located at side of generating set with properly panel visibility.

GENERATING SET CONTROL UNIT

The DSE 7320 control module is a standard addition to our generator sets from 220 kVA upwards and it has been designed to start and stop diesel and gas generating sets that include electronic and non electronic engines.

The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch.

The DSE7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

STANDARD SPECIFICATIONS

Microprocessor controlled

- 132 x 64 pixel LCD display makes information easy to read
- Front panel programming and also via PC software
- Soft touch membrane keypad and five key menu navigation
- Remote communications via RS232, RS485 and ethernet.
- Event logging (50) showing date and time
- Multiple date and time engine exercise mode and maintenance scheduler
- Engine block heater control.
- Controls; stop, manual, auto, test, start, mute lamp test/transfer to generator, transfer to mains, menu navigation.

Instruments

ENGINE

Engine speed
Oil pressure
Coolant temperature
Run time Battery volts
Engine maintenance due

GENERATOR

Voltage (L-L, L-N)
Current (L1-L2-L3)
Frequency
Earth current
kW
Pf
kVA
kWh, kVAh, kVAh
Phase sequence



MAINS

Voltage (L-L, L-N)

Frequency

WARNING

Charge failure

Battery under voltage

Fail to stop

Low fuel level (opt.)

kW over load

Negative phase sequence

Loss of speed signal

PRE-ALARMS

Low oil pressure

High engine temperature

Low engine temperature

Over /Under speed

Under/over generator frequency

Under/over generator voltage

ECU warning

SHUT DOWNS

Fail to start

Emergency stop

Low oil pressure

High engine temperature

Low coolant level

Over /Under speed

Under/over generator frequency

Under/over generator voltage

Oil pressure sensor open

Phase rotation

ELECTRICAL TRIP

Earth fault

kW over load

Generator over current

Negative phase sequence

**Options**

High oil temperature shut down

Low fuel level shut down

Low fuel level alarm

High fuel level alarm

EXPANSION MODULES

Editional LED module (2548)

Expension relay module (2157)

Expansion input module (2130)

Standards

Electrical Safety / EMC compatibility

BS EN 60950 Electrical business equipment

BS EN 61000-6-2 EMC immunity standard

BS EN 61000-6-4 EMC emission standard

STATIC BATTERY CHARGER

Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency.

Battery charger models' output V-I characteristic is very close to square

2405 has fully output shot circuit protection and it can be used as a current source.

2405 charger has high efficiency, long life, low failure rate, light weight and low heat radiated in accordance with linear alternatives.

The charger is fitted with a protection diode across the output.

Charge fail output is available.

Connect charge fail relay coil between positive output and CF output.

Input: 196-264V.

Output: 27,6V 5A or 13,8V 5A.

STANDARD SPECIFICATIONS

- Heavy duty, water cooled naturalgas engine
- 46/50 °C ambient rated radiator with mechanical fan
- Protective grille for fan and rotating parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine jacket cooling heater
- Static battery charger
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel belows supplied separately
- Manual for use and installation

**OPTIONAL EQUIPMENTS****ENGINE**

Remote Radiator Cooling

ALTERNATOR

Anti-Condensation heater

Over sized alternator

Main line circuit breaker

CONTROL SYSTEM

Remote annunciator panel

Remote alarm panel

Alarm output relays

Erath fault, single set

Charging ammeter

TRANSFER SWITCH

Three Pole Contactor

Four Pole Contactor

WISE ACCESSORIES

Manuel oil drain pump

Electrical oil drain pump

Enclosure: weathe protective or sound attenuated

Duct adapter (on radiator)

Inlet and outlet motorised louvers

Tool kit for maintenance

Supplied with oil and coolant- 30 °C

AKSA CERTIFICATES

- CE
- 2000/14/EC